
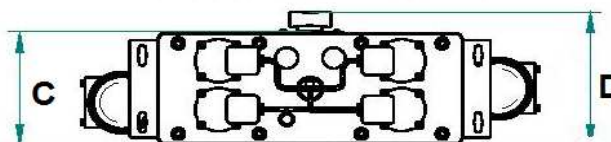


**MODEL**

**HGO 80**

Option -70 °C

|                              |                   |           |                            |
|------------------------------|-------------------|-----------|----------------------------|
| OPERATING DATA               | m <sup>3</sup> /h | 80        | 60                         |
|                              | l/min             | 1333      | 1000                       |
|                              | CFM               | 47        | 35                         |
| Power supply                 | V/ph/Hz           | 230/1/50  |                            |
| Air connection               | IN / OUT          | 1" - 1"   |                            |
| Inlet Air Temperature        | °C                | 35        |                            |
| Working pressure             | bar               | 7         |                            |
| Pressure Dew Point           | °C                | -40       | -70                        |
| Regeneration Air Consumption | %                 | 10% - 15% | 15% - 18%                  |
| Weight                       | kg                | 58,9      |                            |
| Minimum Working Pressure     | bar               | 5         |                            |
| Maximum Working Pressure     | bar               | 10        |                            |
| Minimum Inlet Air Temp.      | °C                | 1         |                            |
| Maximum Inlet Air Temp.      | °C                | 40        |                            |
| Minimum Ambient Temp.        | °C                | 1         |                            |
| Maximum ambient Temp.        | °C                | 40        |                            |
| Dessicant Medium             |                   | Alumina   | Alumina<br>Molecular Sieve |

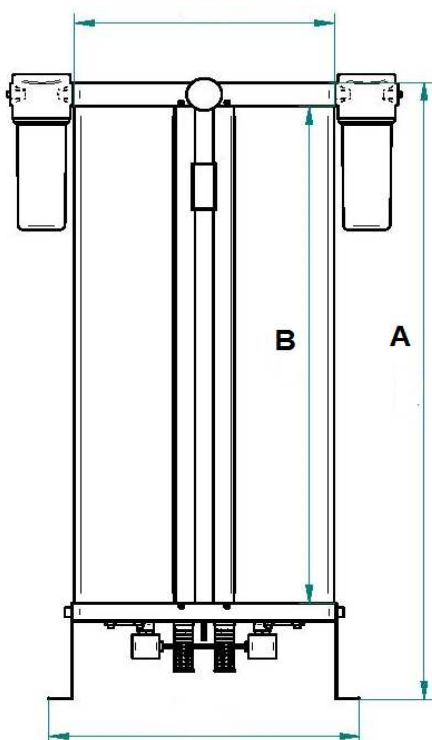

|   |    |      |
|---|----|------|
| A | mm | 1030 |
| B | mm | 830  |
| C | mm | 165  |
| D | mm | 190  |